




HIGH PRESSURE
WASHING FORBIDDEN

TECHNICAL SPECIFICITIES

- Unik4 connected directly to the battery
- Voltage: 12 to 24V
- Protection by a 5A fuse

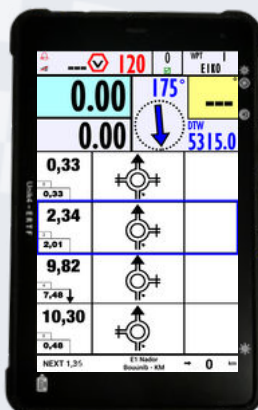

Screen Size
8 inches



GPS Dimensions
227 x 142 x 55 mm



GPS Weight
1,20 kg

MANDATORY ACCESSORIES




BRACKET



The bracket must be mounted vertically as shown.
The fixation to the dashboard must include the silent-blocs.
There must be enough clearance between the dashboard and the bracket to access cables easily.

SUPC-209


DRILLING DIMENSIONS

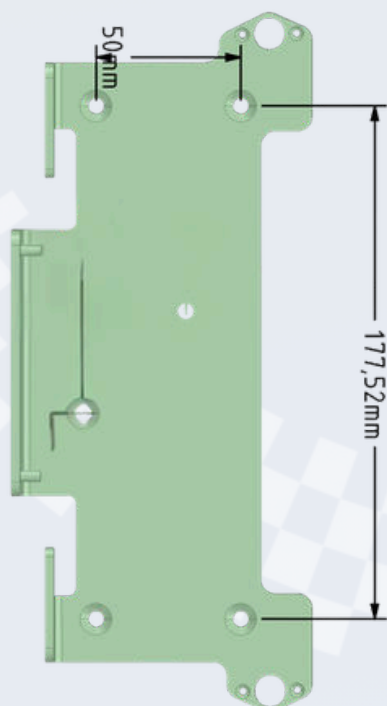


SILENT-BLOCS

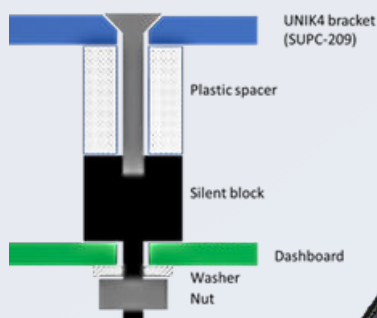

SIBA-209

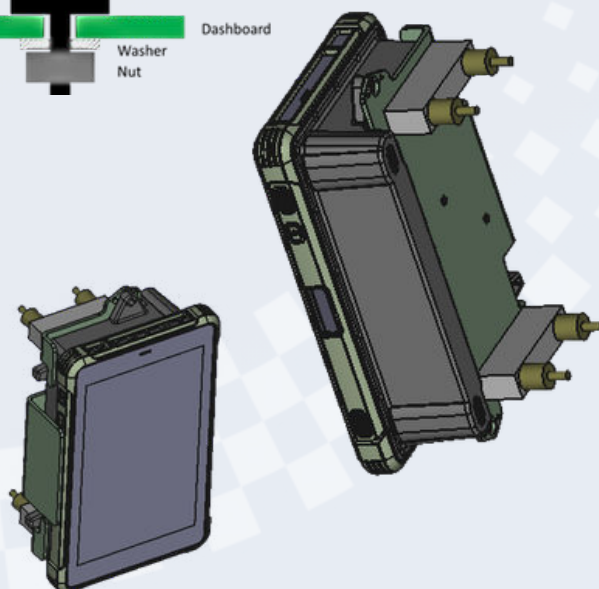

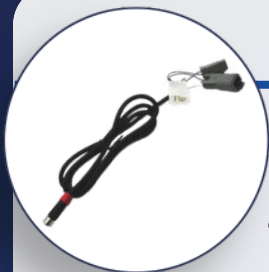

POWER CABLE

12V to 24V.

Protection by a 5A fuse

⚠ The vehicle's main circuit breaker must act on the positive but the Unik4 must be connected directly.

CALC-105


Prepare a power cable from the battery to where the Unik4 will be installed, equipped with terminals and a Faston connector not supplied (see details below).

This cable must be protected from any pinching or friction.

Faston and Terminals References:

Connecteur Faston: TE Connectivity 180907-0 Cosses:

TE Connectivity 42238-2, serial FASTIN-FASTON



MAGNETIC GPS ANTENNA

The upper part of the antenna (ERTF logo) must point towards the sky and must not be obscured by metal or carbon fiber objects, nor painted.



AEGPS-102



SENTINEL BUZZER

Connects to the Buzzer Cable from the GPS.

Must not be obstructed.

SONO-109

SENTINEL ANTENNA

Installation of the antenna with the 2 collars and spacers provided (MANDATORY), on the vertical arch on the right side, in its upper part and closest to the windshield.

⚠ IMPORTANT: The Sentinel radio antenna must see the road and must be at least 2cm away from any surface (no mounting against the dashboard).



AESE-106